

Astrawireless Quanta Q6-25

PRODUCT DATASHEET

Description

Quanta Q6-25 is 6 GHz point-to-point unit with integrated antenna 25 dBi

Antenna

Integrated dual-pol antenna, 25 dBi, 8x8 deg

Recommended distance

Up to 60 km

Frequency range

6000-6425 MHz

Channel width

3.5, 5, 7, 10, 14, 15, 20, 28, 30, 40, 50, 56 MHz

Net throughput

Up to 650 Mbps in 56 MHz
Up to 460 Mbps in 40 MHz
Up to 230 Mbps in 20 MHz

Packet performance

1 200 000 pps

Transmit power

from -10 to 27 dBm*, step 1 dBm

Receiver sensitivity

down to -101 dBm

Center frequency adjustment step

1 MHz



Astrawireless

*May be limited by regional EIRP restrictions

Astrawireless Quanta Q6-25

PRODUCT DATASHEET

Wired Interfaces	1x Combo port GigabitEthernet/SFP
Duplex scheme	TDD
Consumption	Up to 15 W
Power options	90-240 VAC ~ @ 50/60 Hz, +-43..56 VDC
Part Number Example	Q6-25
Form Factor and Dimensions	Outdoor Unit (ODU) 350 x 350 x 71.5 mm, 2.3 kg Indoor Unit IDU-CPE-G (24W) 97 x 53.5 x 35.5 mm 0.133 kg
Packing List	• Outdoor unit Q6-25 - 1 pcs • Power Supply IDU-CPE-G(24W) - 1 pcs • Power Cord - 1 pcs • Cable Gland for RJ-45 - 1 pcs • Cable Gland for SFP - 1 pcs • Standard RJ-45 connector - 1 pcs • Shielded RJ-45 connector - 1 pcs • RJ-45 Plug Cap - 1 pcs • MONT-KIT-85 Mounting kit - 1 pcs • Quick Start Guide - 1 pcs



Astrawireless

Astra Wireless Technology. All rights reserved.
www.astrawireless.net
sales@astrawireless.net

RADIO FEATURES

- **Radio technology**
MIMO 2x2, SC-FDE
- **Modulation types**
14 MCS – from QPSK 1/4 to QAM256 7/8
- **Spectrum Analyzer mode**
Channel testing tools
- **DFS / Radar detection**
- **Air frame Configurable**
1, 2, 5, 10 ms
- **Uplink / Downlink ratio Configurable**
from 50:50 to 92:8, in any direction
- **Automatic** Bitrate Control
Automatic Transmit Power Control
Automatic Distance Learning

Unique interference mitigation capabilities

Built-in spectrum analyzer and antenna alignment tools

Easy operation due to automatic control options

NETWORKING FEATURES

- **MAC**
VLAN 802.1q
- **Quality of Service**
IEEE 802.1p support
8 priority queues
- **Full-fledged 2nd layer switch**
- **Transparent L2 transport for Ethernet traffic**

MANAGEMENT AND SECURITY

■ Various Management Protocols HTTP, HTTPS, SSH, Telnet, SNMP v1/2c/3 (MIB-II and proprietary MIBs)	■ Antenna alignment tool Automatic software update Online monitoring with EMS NEXT WEB GUI	■ Safety & Security Storm/flood protection Password protection Secure CLI access via SSH protocol	■ LED Indication Power status Wireless and wired link status Signal level
--	--	--	--

STANDARD COMPLIANCE


■ Radio ETSI EN 301 893 v.2.1.1 ETSI EN 302 502 v.2.1.1 FCC part 15.407	■ EMC ETSI EN 301 489-1 ETSI EN 301 489-17 FCC Part 15 Class B	■ Safety EN 62368-1:2014+A11:2017 UL 62368-1:2014 RoHS3 RoHS3 Directive 2015/863/EU (pending)	■ Lightning protection IEC 61000-4-2: +/-4kV (contact discharge), +/-8kV (air discharge) IEC 61000-4-4: +/-0.5kV IEC 61000-4-5: +/-1kV (line-to-ground), +/-0.5kV (line-to-line)
--	---	--	---

OPERATION OPTIONS


■ Power options 90–240 VAC @ 50/60 Hz ±43.56 VDC 802.3at or Proprietary PoE	■ Outdoor Unit environmental conditions -40..+60°C, can be extended to -55..+60°C (models with "t" index in PN) 100% humidity, condensing Dust and water protection IP66, IP67 Wind load 160 km/h, operational; 200 km/h, survival	■ Indoor Unit environmental conditions 0..+40°C 95% humidity, non-condensing
--	--	--

Radiation pattern


E-plane H-pol

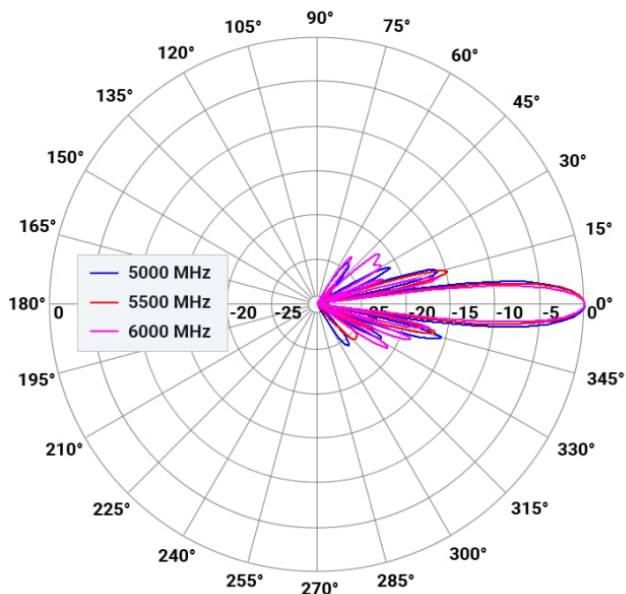


E-plane V-pol

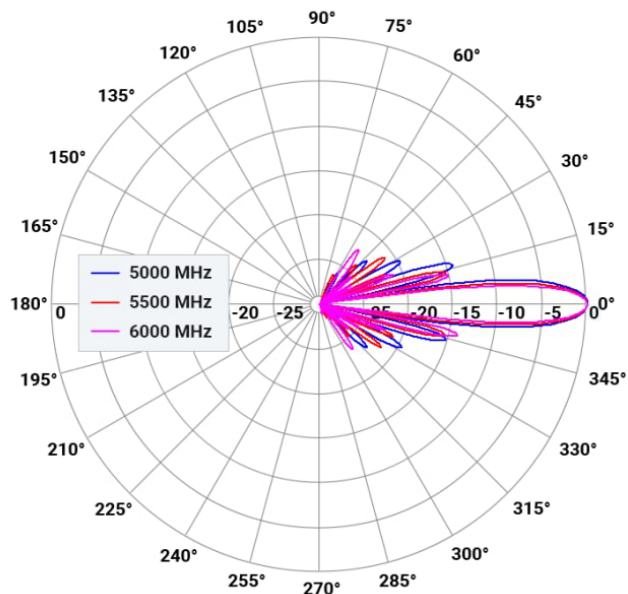

H-plane H-pol

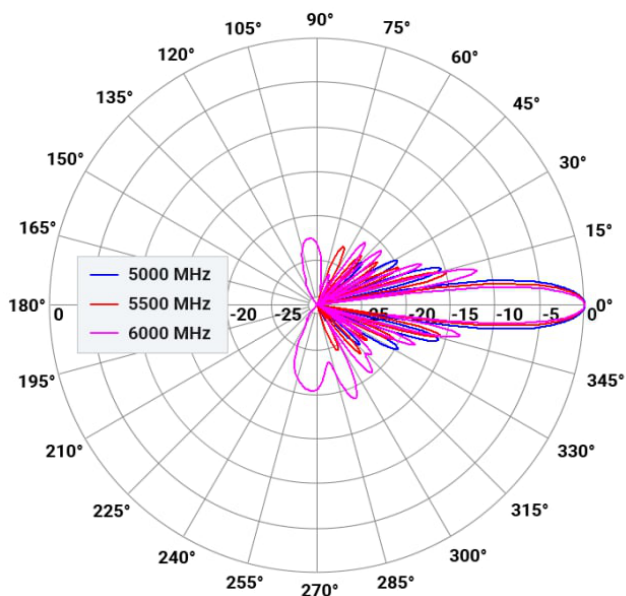

H-plane V-pol

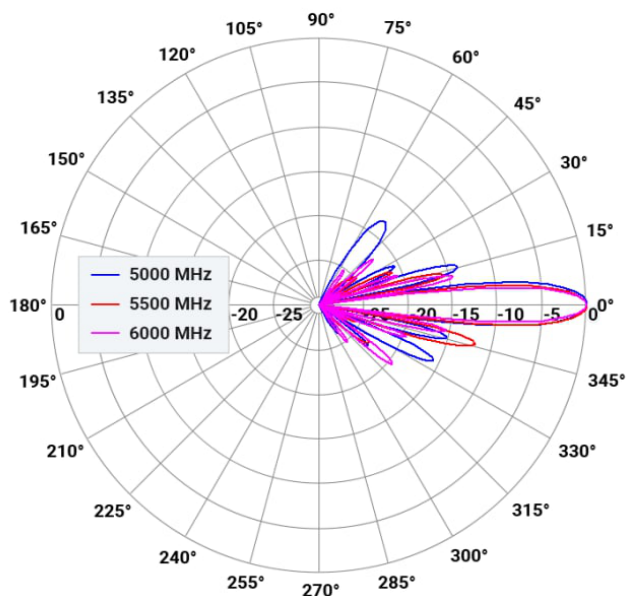

Astrawireless

Astrawireless Technology. All rights reserved.

www.astrawireless.net

sales@astrawireless.net